

# Motorcycle Battery (MT Series) YB5L - BS (12V 5Ah)

## Specifications

Rated Voltage	12V	
Nominal Capacity	5 Ah	C10 1,8V/cell
Dimension	Length	119±2mm
	Width	60±2mm
	Container Height	129±2mm
Approx Weight	1.77 Kg	
Terminal	C1	
Container Material	ABS	
CCA@-18°C	65A	

Retention of Charge Storage %25°C	1 month	97%	Directly Mounted
	3 month	90%	Directly Mounted
	6 month	80%	Contact Volts: 14,4V Limit Current: 1A Charging Hours: 2-3H
	12 month	40%	Contact Volts: 14,4V Limit Current: 1A Charging Hours: 4-6H



## Applications


- Motorcycle
- Motorbike
- ATV (All terrain vehicle)
- Scooter
- Personal Watercraft
- Personal Snowmobile
- Garden Machinery

## General Features


- Protects against leakage and corrosion and provides for extra strength and durability.
- Absorbed Glass Matt separators absorb the electrolyte and make the battery spill proof.
- The valve regulated design eliminates water loss and the need for refilling.



## Discharge Characteristics

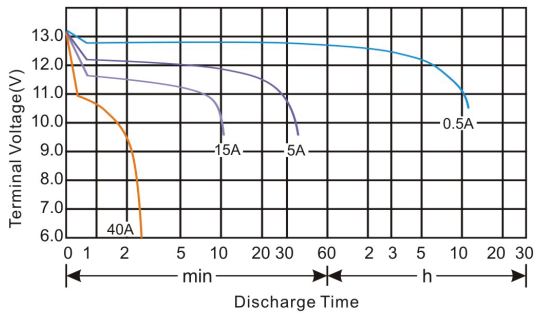

## Float Charging Characteristics

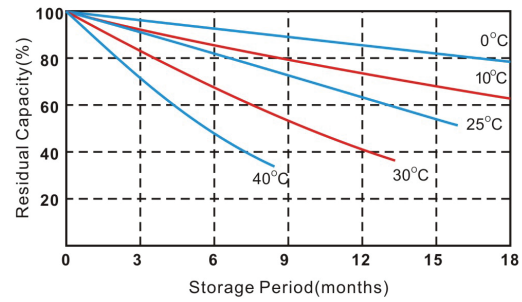

## Layout

