

Motorcycle Battery (MT Series) YTX9-BS (12V 9Ah)

Specifications

Rated Voltage	12V	
Nominal Capacity	9 Ah	C10 1,8V/cell
Dimension	Length	150±2mm
	Width	87±2mm
	Container Height	107±2mm
Approx Weight	2.93 Kg	
Terminal	C4	
Container Material	ABS	
CCA@-18°C	120A	

Retention of Charge Storage %25°C	1 month	97%	Directly Mounted
	3 month	90%	Directly Mounted
	6 month	80%	Contant Volts: 14,4V
			Limit Current: 1.8A
	12 month	40%	Charging Hours: 2-3H
			Contant Volts: 14,4V
		Limit Current: 1.8A	
		Charging Hours: 4-6H	



Applications


- Motorcycle
- Motorbike
- ATV (All terrain vehicle)
- Scooter
- Personal Watercraft
- Personal Snowmobile
- Garden Machinery

General Features


- Protects against leakage and corrosion and provides for extra strength and durability.
- Absorbed Glass Matt separators absorb the electrolyte and make the battery spill proof.
- The valve regulated design eliminates water loss and the need for refilling.



Discharge Characteristics

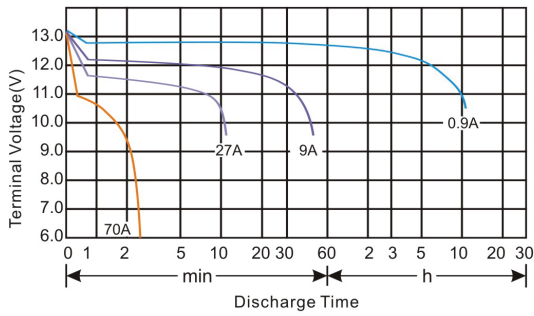

Float Charging Characteristics

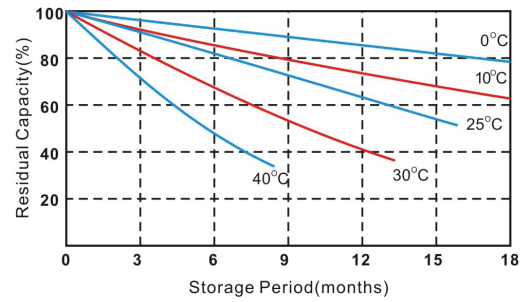

Layout

